





CABLE-TO-CABLE CONNECTION

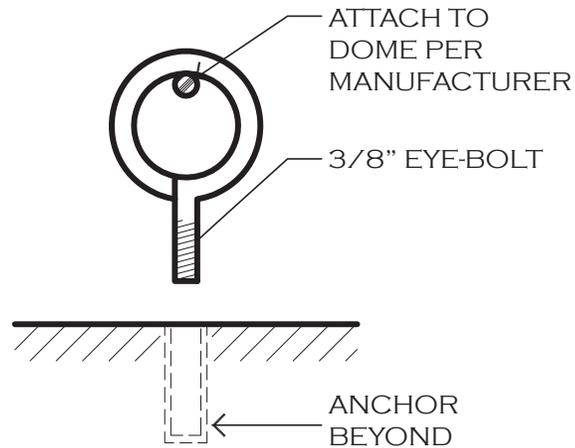

CROSS SECTION
DECK ANCHOR & EYE-BOLT

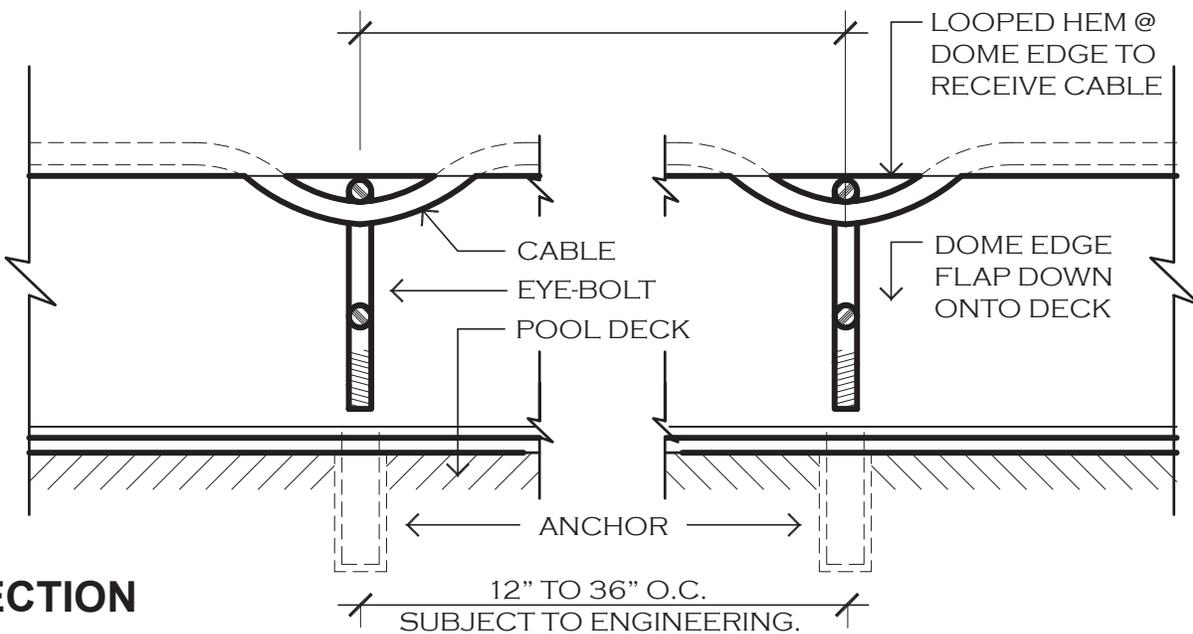

SECTION

* NOTE: ALL HARDWARE AS SUPPLIED BY MANUFACTURER; CONTRACTOR SHALL FOLLOW SUPPLIER / MANUFACTURER'S INSTALLATION INSTRUCTIONS AND REQUIREMENTS; SEE MANUFACTURER'S SPECIFICATIONS FOR FURTHER INFORMATION.

| BOLT DIA In. (mm) | ANCHOR DIA In. (mm) | MIN. EMBEDMENT In. (mm) | ANCHOR TYPE | TENSION Lbs. (kN) | | | SHEAR Lbs. (kN) |
|----------------------|---------------------------|-------------------------------|----------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
| | | | | f' c = 2000 PSI (13.8 MPa) | f' c = 4000 PSI (27.6 MPa) | f' c = 6000 PSI (41.4 MPa) | f' c >_ 2000 PSI (13.8 MPa) |
| 3/8 (9.5) | 1/2 (12.7) | 1-5/8 (41.3) | RM or SS | 2,980 (13.3) | 3,800 (16.9) | 6,240 (27.8) | 3,160 (14.1) |