





# Ameri-Brand Products Inc

## Crash Door Install Pics and Text ALCD

### Installing the ALCD Combo

The Crash Door is attached to the Airlock as a separate module. Once the Airlock has been assembled, the Crash Door Module can then be attached to it. Use the 3-1/2" Bolts provided to attach them together. The holes are pre-drilled. You may need to use your awl to align the holes & possibly run a 1/4" drill bit through them to make the work easier.

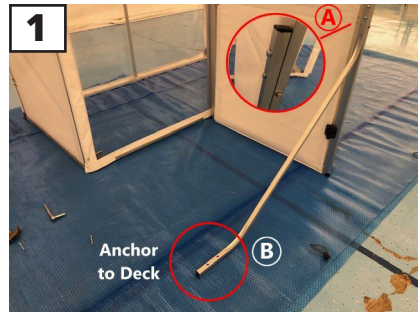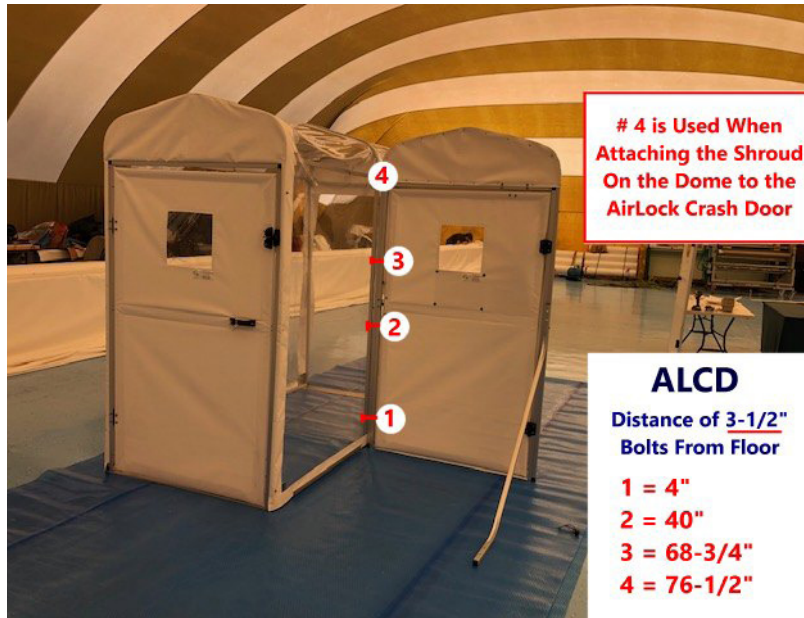


**1** The Top of the Support Brace is attached to the Crash Door as shown in picture below as "A". The Bottom of the Support Brace is anchored into the Pool Deck Using (2) RM-38 "Redhead" style Expansion Anchors, (2) Washers, & (2) 1"x 3/8-16 Hex Bolts. See picture below shown as "B".

**2** The Crash Door swings away from the pool. An automatic door closer is installed to prevent excess air loss if the door is accidentally opened.

**3** After Hours "Security Pin".

**4** Once completed, the Airlock can be mounted to the deck using the Hardware provided on CARD #2.

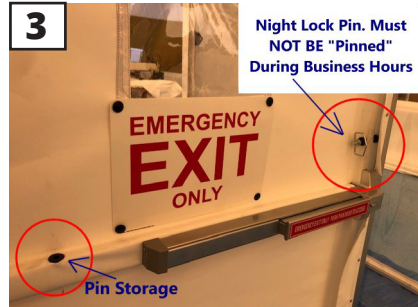

### Ameri-Brand Products Inc

4619 Olive Hwy.  
Oroville, CA. 95966  
800-982-6966

www.ameri-brand.com • info@go-ab.com

DomeALCD-196 rev-3-12-2021 TJM